

v5 Online Video Identification Scenario - Example involving Namirial LiveID+ to identify for QES

Use Case Description

With LiveID+, identifications can be dealt with live. In addition to extensive identification checks, LiveID+ can also be used to sign documents live. Thus, LiveID+ is a perfect tool with which you can ensure that the right documents (passport etc.) are from the right person. With LiveID+ you can instantly check the identification types as photos are taken of the e.g. passport. Furthermore, you can also use the microphone to communicate with the recipient or use the integrated chat window for communication.

Before proceeding with the integration it is mandatory to start with the platform setting, that provides a set of useful information about the organization requesting the integration with LiveID +.

For detailed information about this settings please have a look at: [Platform setup](#)

For more information please also see this [LiveID-Video-Identifikationsverfahren](#)


In order to answer a call an organization must be inserted between those managed by at least one operator. A single operator can manage calls for more than one organizations, that means that any operator will need to select, once logged in, for which organization want to receive calls. There are two operator types: administrator and standard. The standard one has limited access to the administration panel which only includes calls answering and editing of some of its personal information. The administrator one, in addition to standard operator features, can register other operators of the administered organizations and entering report panel. For each operator connected to a single organization must be defined a role : the purpose of role is to limit the type of video-recognition flows that can be managed by an individual operator connected to an organization. For example, if an organization has several different processes with roles can indicate operators able to manage only a list of processes and other ones able to manage all the available processes.

Only for resident operators the LiveID+ administration panel is available at the following link:

– TEST: <https://liveid.test.namirialtsp.com/app/service-login/>

– PRODUCTION: <https://liveid.namirialtsp.com/app/service-login/>


Settings
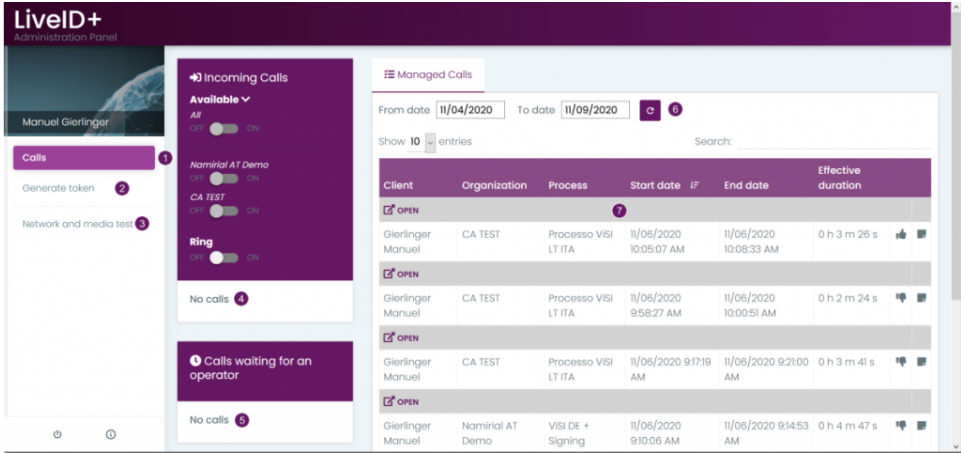
| Figure | Description |
|--|---|
|  | <ul style="list-style-type: none">a. Calls settingsb. Generate a token (persistent, temporary)c. Network and media testd. Incoming callse. Calls waiting for an operatorf. Filterg. Overview of all calls |

Generate Token

You can either generate a persistent token or a temporary token (valid for 60 minutes). You can forward the generated token to the recipient of the call to start the call.

Please also see the next figure:

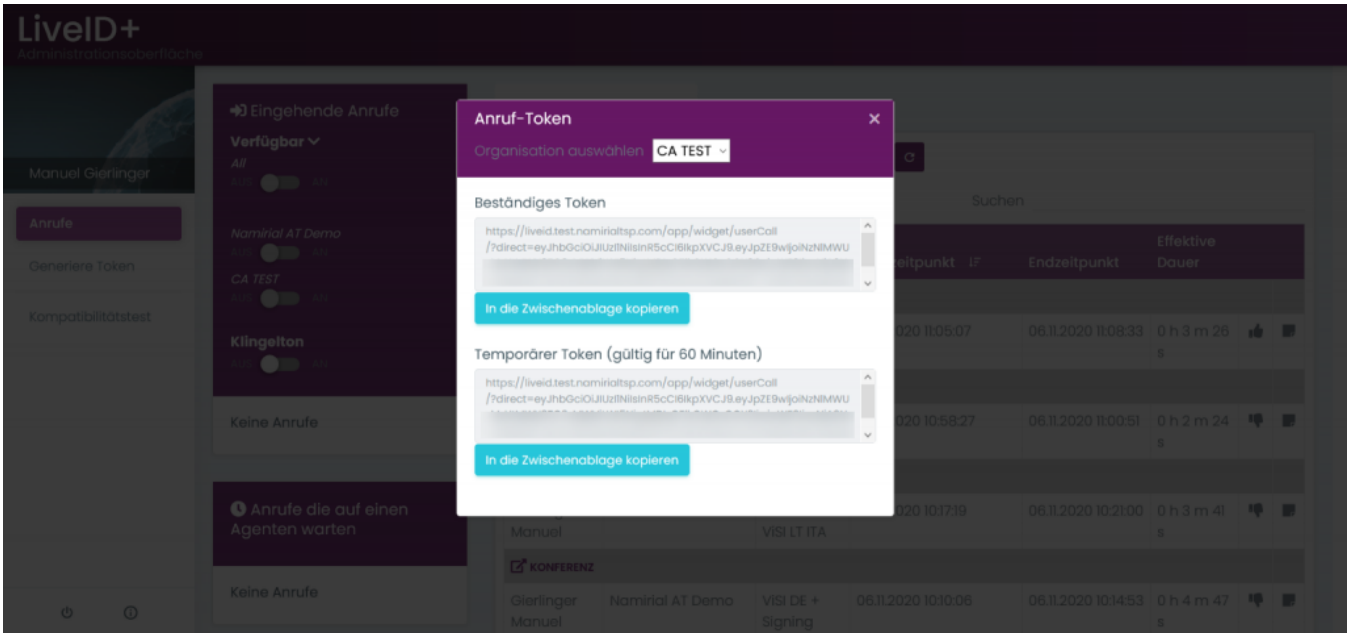

Network and media test

In this section you can test your network and media (network and system compatibility, microphone, camera and WebRTC). This test is necessary to start an call.

Start a call

Your browser does not support the HTML5 video element


Download Process Data

After finishing the call you can download the process data. Click on the “open” button like it is shown in the next figure:

| Figure | Description |
|--------|--|
| | <ol style="list-style-type: none"> Click “open” to get to the download page |


Afterwards, you get to the page like it is shown in the figure, where you can download the process data:

| Figure | Description |
|--------|-------------|
|--------|-------------|

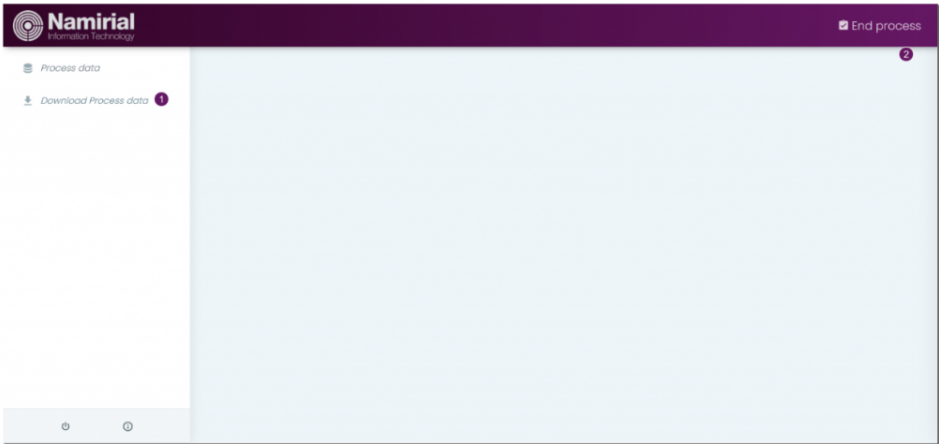

1. Download the process data
2. End the process

If you end the process you can add a note, which you can later see on the main page far right of a call.
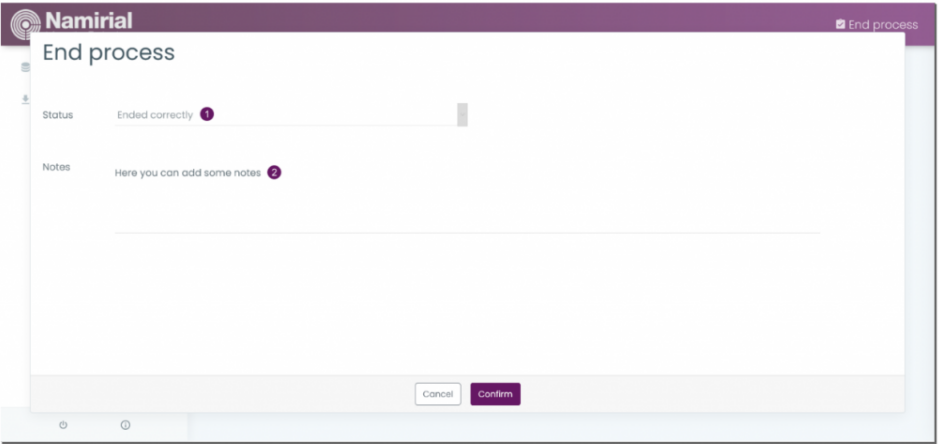
| Figure | Description |
|---|---|
|  | <ol style="list-style-type: none"> 1. Status of the call 2. Additional note |

Integration

Download Data via REST

Please also see the documentation of all REST API calls here: <https://liveid.namirialtsp.com/doc/>

First, check if the service is active. For this call you need no authorization. Simply run the following api call (GET) with the URI: <https://liveid.test.namirialtsp.com/api/v1/checkStatus>

If the service is active you will get the following response:

```

{
  "success": true,
  "service": "/checkStatus",
  "active": true
}

```

Get the conference data

You need the following URI to get the conference data: <https://liveid.test.namirialtsp.com/api/v1/conferenceData/>

Moreover, you also need the token provided on call closing. Please see the following sample callback which contains the close status, the token and the conference id:

Welcome to Namirial.
Please fill out the fields below to start the call.

Org
CA TEST (CATE)

First name*
Manuel

Avoid special characters

Last name*
Gierlinger

Avoid special characters

Email*

Callback

Event: close - Message:
{ "closeStatus": "N", "token": "eyJhbGciOiJIUzI1NiIsInR5cCI6IkpXV...", "id": "8c4ff151-2017-11eb-b968-02199d9d18f4" } - ID

Conf. Process: 8c4ff151-2017-11eb-b968-02199d9d18f4

OK

Please also see the next figure which shows a sample call with Postman:

getdata

Examples 0 BUILD

POST https://liveid.test.namirialtp.com/api/v1/conferenceData/ Send Save

Params Authorization Headers (8) Body Pre-request Script Tests Settings Cookies Code

none form-data x-www-form-urlencoded raw binary GraphQL

| KEY | VALUE | DESCRIPTION |
|---|--|-------------|
| <input checked="" type="checkbox"/> token | eyJhbGciOiJIUzI1NiIsInR5cCI6IkpXV..... | |
| Key | Value | Description |

Body Cookies Headers (10) Test Results Status: 200 OK Time: 198 ms Size: 2.95 KB Save Response

Pretty Raw Preview Visualize JSON

```
1 {
2   "service": "/conferenceData/",
3   "success": true,
4   "data": {
5     "data": {
6       "user_1": {
7         "name": "f
```

Get the audit trail

To get the audit trail you need again the token and additionally the conference id as authentication. Please see the next figure which shows a sample call to get the audit trail:

getaudit

Examples 0BUILD

GEThttps://liveid.test.namirialtsp.com/apl/v1/getAuditData/

SendSave

ParamsAuthorizationHeaders (8)BodyPre-request ScriptTestsSettings

CookiesCode

noneform-datax-www-form-urlencodedrawbinaryGraphQL

| | KEY | VALUE | DESCRIPTION | ... | Bulk Edit |
|-------------------------------------|--------------|--|-------------|-----|-----------|
| <input checked="" type="checkbox"/> | token | eyJhbGciOiJIUzI1NiIsInR5cCI6IkpXV..... | | | |
| <input checked="" type="checkbox"/> | idConference | 02f63a50-1234-abcd-1234-123456789 | | | |
| | Key | Value | Description | | |

BodyCookiesHeaders (12)Test Results

Status: 200 OKTime: 1720 msSize: 596.4 KBSave Response

PrettyRawPreviewVisualizeText