


REST tutorial using Postman

- [How to integrate with Postman](#)
 - [Collection](#)
 - [Create a request](#)
 - [Authentication](#)
 - [First API Call \(version\)](#)
 - [Upload a file](#)
 - [Sending an envelope](#)
 - [Open the envelope](#)
 - [Download the signed document](#)
- [How to use variables in Postman](#)
 - [Authentication](#)
 - [Upload a file](#)
 - [Send an envelope](#)
 - [Download the file](#)
 - [Overview of all variables](#)
 - [Advantages of using variables in Postman](#)

How to integrate with Postman

Collection

In this tutorial you will do the first API call as well as sending envelopes, upload documents and download signed papers. Let us start with creating a collection so that we can save all requests there.

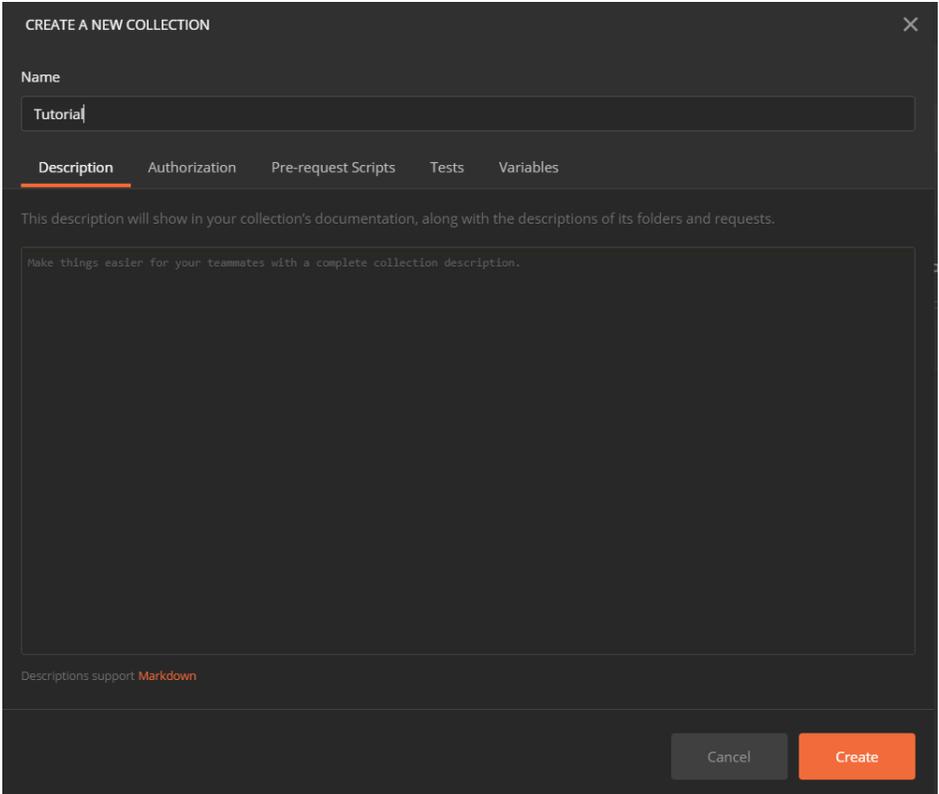Figure	Steps
	<p>Steps:</p> <ol style="list-style-type: none">1. Go to register "new"2. Select "Collection"

Create a request

After creating a new Collection, we will save our first request into it.

Figure	Description
--------	-------------

SAVE REQUEST

Request name

version

Request description (Optional)

Make things easier for your teammates with a complete request description.

Descriptions support **Markdown**

Select a collection or folder to save to:

Search for a collection or folder

Tutorial + Create Folder

Cancel Save to Tutorial

Steps:

1. Go to register "new"
2. Select "request"
3. Choose a name and save the request in the collection

Authentication

The next request will show you an authorization. This is an important part of the requests for sure but not only because of security but also because we will need the authorization for all following requests.

For authentication, you'll need an api token. v 20.42

Please see the next sample authorization (Bearer token):

Key	Value
"Authorization"	"Bearer asdfngtmvv8pfmsuaxpzz85zux3e63dd9ztrwix9mln6qka6tds83du3p3lroe"

Please see the next sample authorization (api token):

Key	Value
"ApiToken"	"asdfngtmvv8pfmsuaxpzz85zux3e63dd9ztrwix9mln6qka6tds83du3p3lroe"

You can find this information in Settings / Api Tokens and Apps. Note that all API methods require an authentication. The API token is a user specific secret which should not be shared with other users. We recommend to create different API keys for different application integrations, to avoid configuring the same key in various integration systems. This allows, e.g. in case of sharing a key by mistake, to disable one key while keeping other integrations working with their existing configuration.

The authentication with the organizationKey and the userLoginName is not recommended! It is only available for api version 1 to 5.


First API Call (version)

Let us start now with the first API call. As the name of our request tells we will first make an easy call to examine the current version.

System ^

GET /v6/system/version Returns the current version of eSignAnyWhere. v 🔒

Figure	Description
--------	-------------

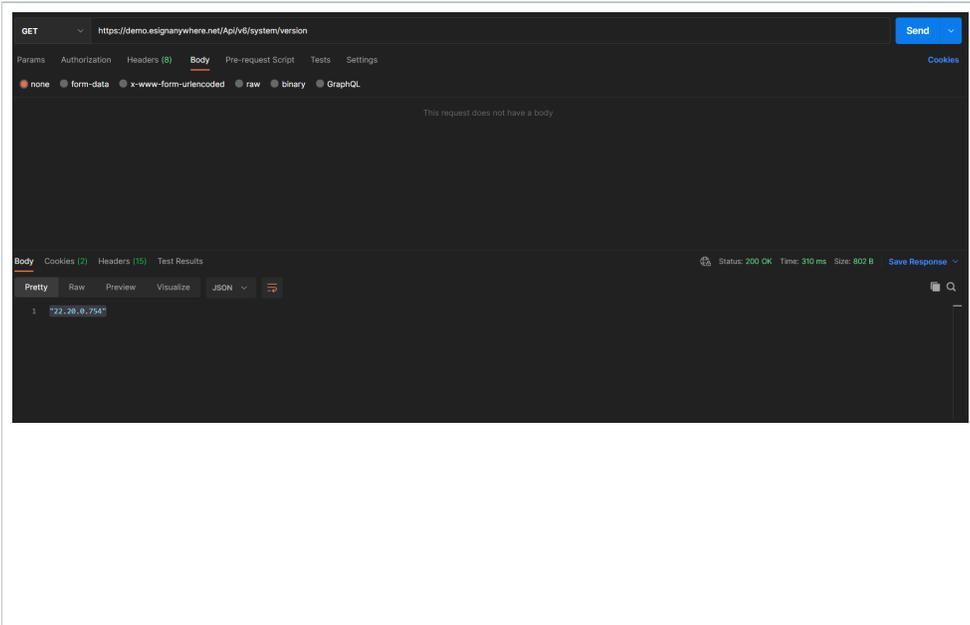

Steps:

1. Set the request type to GET
2. Set the URI: <https://demo.esignanywhere.net/Api/v6/system/version>
3. Add the authentication (Api Token) in the header

Response


```
"22.20.0.754"
```

Upload a file

 It is not allowed to upload multiple files at once (when more files are selected).

Before we can send an envelope, we must make sure that we have already uploaded a file. Therefore, the next request will be about uploading a file.

POST /v6/file/upload Upload a file for temporary use.

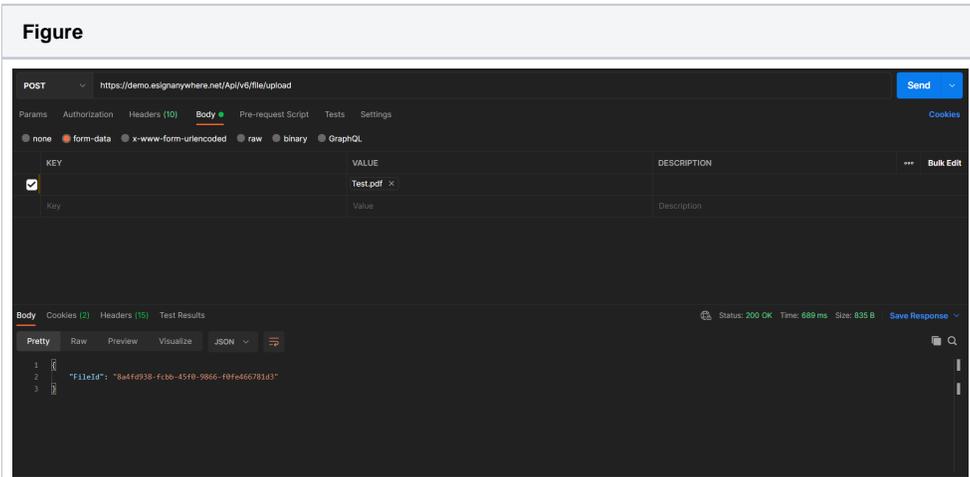

Description

Steps:

1. Set the request type to POST
2. Set the URI: <https://demo.esignanywhere.net/Api/v6/file/upload>
3. Add a file in the section "Body" form-data
4. Add the authentication (Api Token) in the header

Response

```
{
  "fileId": "8a4fd938-1234-1234-9866-f0fe466781d3"
}
```

Please note: The FileId is needed for the next api call.


Sending an envelope

Send the first envelope with the document you have chosen from the upload call.

https://demo.esignanywhere.net/Api/swagger/ui/index#/Envelope/Envelope_Send

and paste it in the body of the sending request. Then change from "none" to "raw" and change the File ID to the one you get from the upload file request.

POST /v6/envelope/send Directly create and send an envelope. ⌵ 🔒

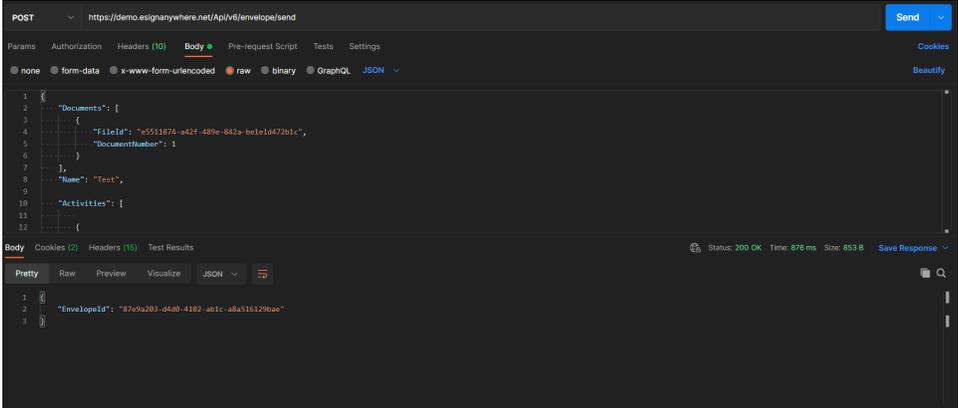Figure	Description
	<p>Steps:</p> <ol style="list-style-type: none">1. Set the request type to POST2. Set the URI: https://demo.esignanywhere.net/Api/v6/envelope/send3. Add the envelope configuration in "Body" (sample configuration below)<ol style="list-style-type: none">a. Please change the type to "raw"b. Change the "Text" to JSON format4. Add the authentication (Api Token) in the header

Response

```
{
  "EnvelopeId": "1393adcf-1234-1234-9173-aba385426549"
}
```

The following sample configuration contains two recipients with the following workflow:

1. First recipient needs to sign with a ClickToSign
2. Second recipient just receives a copy of the signed document

```

{
  "Documents": [{
    "FileId": "d33d43ca-1234-1234-1234-b645fc4e0fb2",
    "DocumentNumber": 1
  }
],
  "Name": "Test",
  "Activities": [{
    "Action": {
      "Sign": {
        "RecipientConfiguration": {
          "ContactInformation": {
            "Email": "jane.doe@sample.com",
            "GivenName": "Jane",
            "Surname": "Doe",
            "LanguageCode": "EN"
          }
        },
        "Elements": {
          "Signatures": [{
            "ElementId": "sample sig click2sign",
            "Required": true,
            "DocumentNumber": 1,
            "DisplayName": "Sign here",
            "AllowedSignatureTypes": {
              "ClickToSign": {
            }
          }
        },
        "FieldDefinition": {
          "Position": {
            "PageNumber": 1,
            "X": 100,
            "Y": 200
          },
          "Size": {
            "Width": 100,
            "Height": 70
          }
        }
      }
    }
  ],
  "SigningGroup": "firstSigner"
}
], {
  "Action": {
    "SendCopy": {
      "RecipientConfiguration": {
        "ContactInformation": {
          "Email": "john.doe@sample.com",
          "GivenName": "John",
          "Surname": "Doe",
          "LanguageCode": "EN"
        }
      }
    }
  }
}
]
}

```

Open the envelope

After you have sent the envelope and you have got the envelopeld you can call the method <https://demo.esignanywhere.net/api/v6/envelope/{envelopeld}/viewerlinks>. With the result of this method you get information about the envelope and you can find the `workstepRedirectionURL` (Viewerlink).

GET

/v6/envelope/{envelopeId}/viewerlinks

Get the available links to access the SignAnyWhere Viewer for active activities.

Figure

TEST Collection / viewerlink

GET https://demo.esignanywhere.net/api/v6/envelope/6e0bef1-1234-1234-945f-229e6b1bc92a/viewerlinks

Params Authorization Headers (7) Body Pre-request Script Tests Settings Cookies

none form-data x-www-form-urlencoded raw binary GraphQL

This request does not have a body

Body Cookies Headers (15) Test Results Status: 200 OK Time: 98 ms Size: 805 B Save Response

Pretty Raw Preview Visualize JSON

```

1 {
2   "ViewerLinks": [
3     {

```

Description

Steps:

1. Set the request type to GET
2. Set the URI: <https://demo.esignanywhere.net/api/v6/envelope/{envelopeId}/viewerlinks>
3. Add the authentication (Api Token) in the header

Response

```

{
  "ViewerLinks": [
    {
      "ActivityId":
"5609d2ea-1234-1234-1234-
1959e63fde64",
      "Email": "john.
doe@sample.com",
      "ViewerLink":
"https://demo.esignanywhere.
net/workstepredirector/sign?
identifier=mdIkzVC1234512Igi
OLD3Iodfynd~12345RbJQXusyZuC
Np7FR6PniOT12345B~fQ1234A=="
    }
  ]
}

```

With this redirection link it is possible to open and sign the document in your web portal.

Download the signed document

Before downloading the documents we need the file ids. Therefore the following api call is necessary:

GET


/v6/envelope/{envelopeId}/files

Get all files included or related to your envelope.



Figure

Description

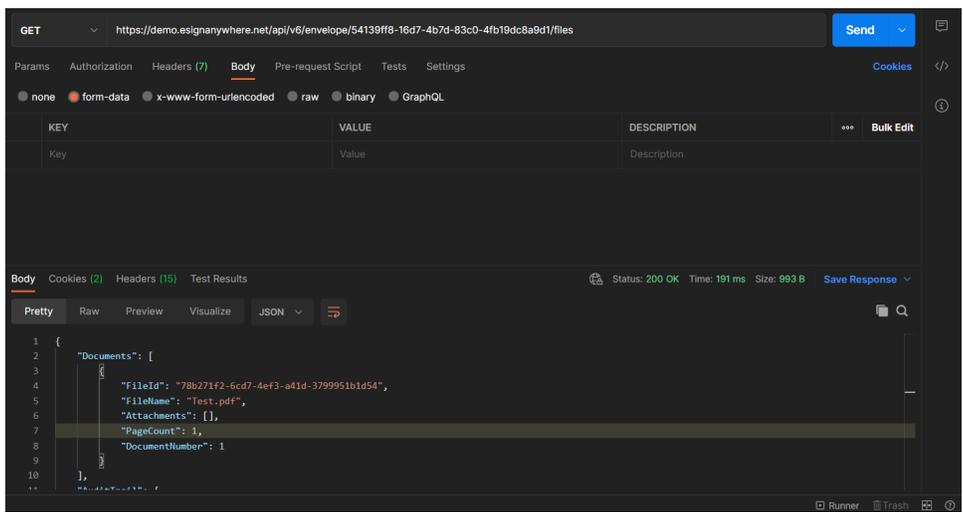

Steps:

1. Set the request type to GET
2. Set the URI: <https://demo.esignanywhere.net/Api/v6/envelope/{envelopeId}/files>
3. Add the authentication (Api Token) in the header

Response

```

{
  "Documents": [
    {
      "FileId":
"78b271f2-1234-1234-1234-3799951b1d54",
      "FileName":
"Test.pdf",
      "Attachments":
[],
      "PageCount": 1,
      "DocumentNumber": 1
    }
  ],
  "AuditTrail": {
    "FileId": "7a86456c-1234-1234-1234-032757afa88e",
    "XmlFileId": "dc60dcd4-1234-1234-1234-8828c79a2c88"
  },
  "Disclaimers": []
}


```

Here you can see all three Ids for the documents which can be downloaded.

After this call just add the Ids in the following api call URI and download the documents:

```
GET /v6/file/{fileId} Downloads a file. Only files belonging to completed envelopes are available.
```

Figure	Description
--------	-------------

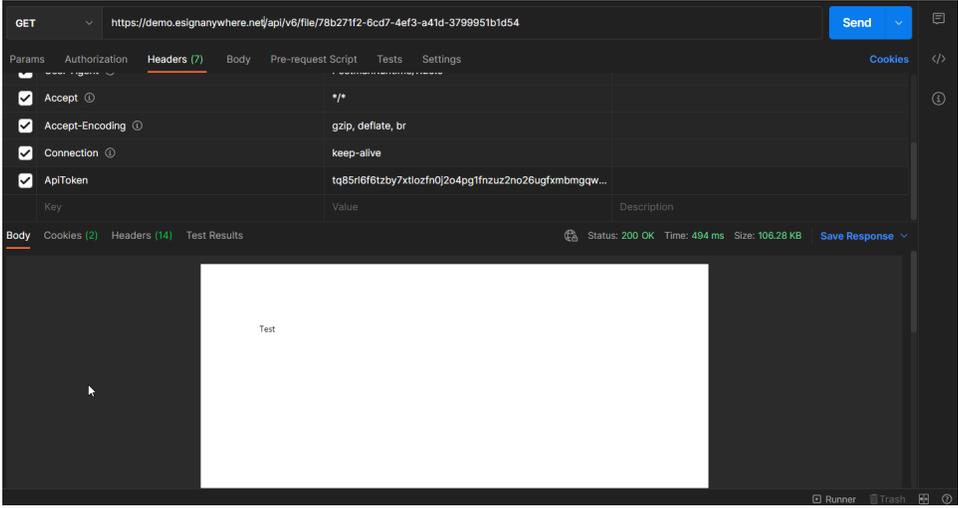

Steps:

1. Set the request type to GET
2. Set the URI: <https://demo.esignanywhere.net/api/v6/file/{fileid}>
3. Add the authentication (Api Token) in the header


Response

Document to download

How to use variables in Postman


Let us start with the authentication but this time we will use variables, so we do not have to remember the api token for all other requests.

Manage environments

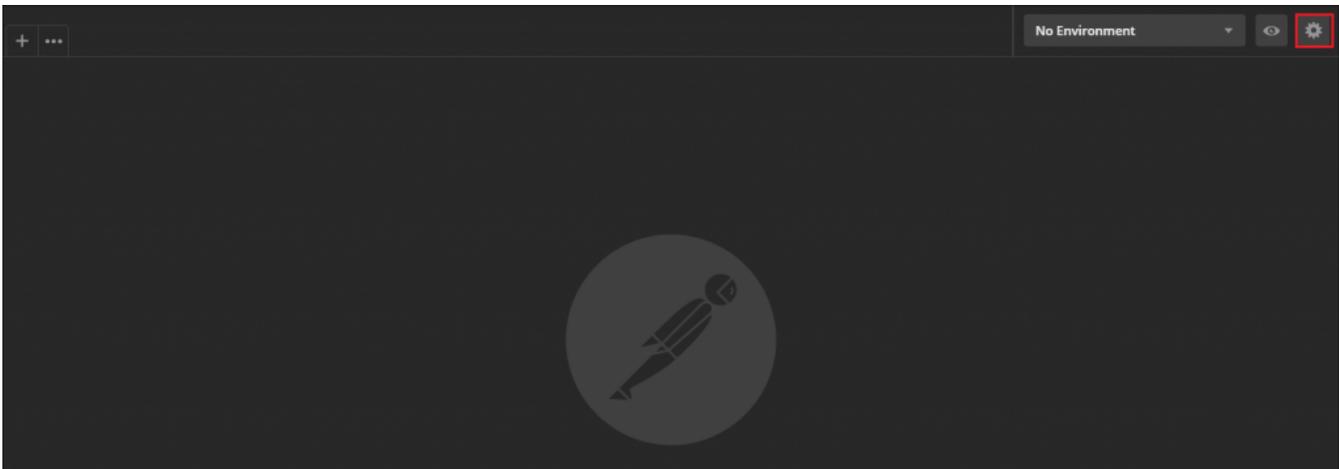

After selecting the configuration button following window should appear:


There you must fill in a name for the environment and we have to create one variable which is necessary for the authentication. Further details in the next Figure:

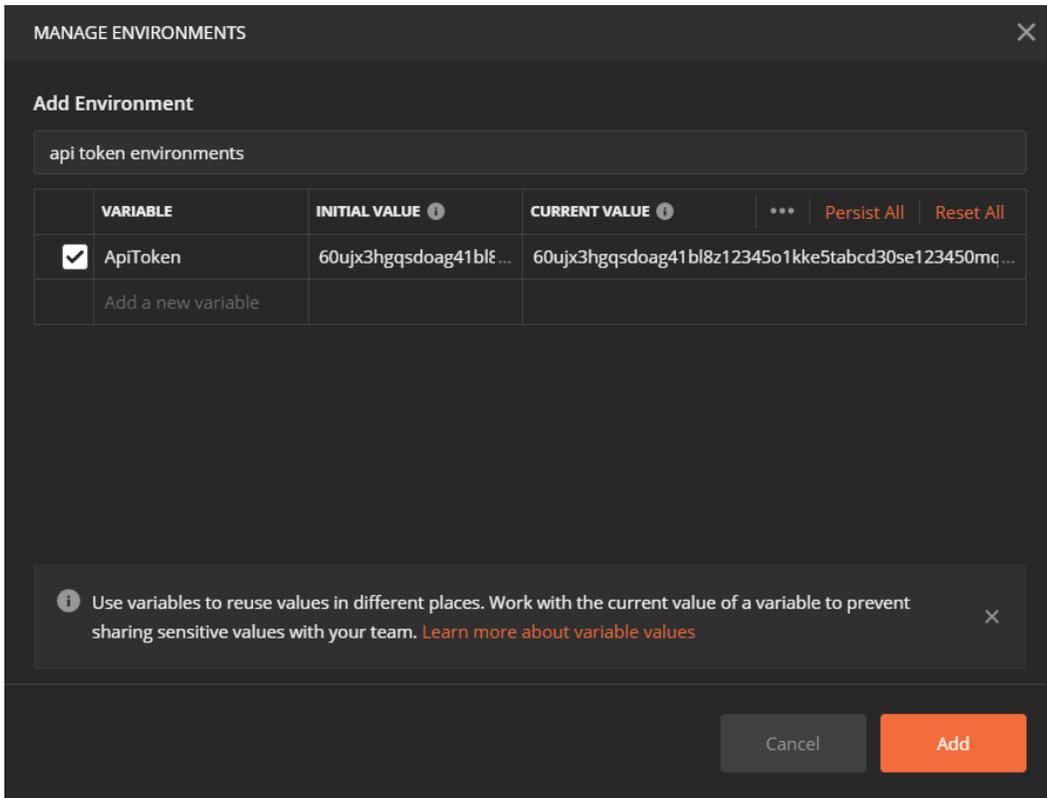

First give your variable a name (it does not matter how you name them). Then fill in "initial value" and "current value" your api token. After filling up the environments for the variable, we now can use it in the header of the next request.

Authentication


The next figure shows you the same request we have already done in the tutorial above but this time we will use the variables we have just created.

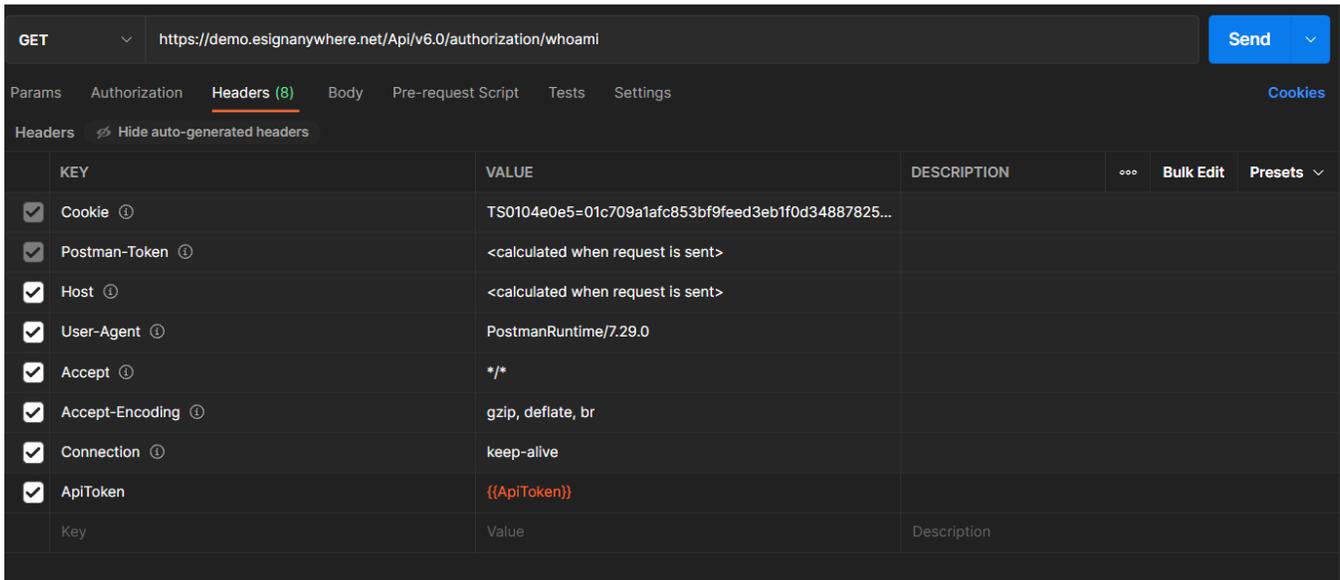

In the first column we have our api token. In the second column we now do not have to fill in our api token, but we must write `{{#name_of_the_variable#}}`. From now on you can always use the variable instead of continual writing your api token because all the dates are saved in the environments. If you run this request, you should get the status "200 OK".


Upload a file

Now we will upload a file and save the file ID which we will get from the request in another variable in the environments.

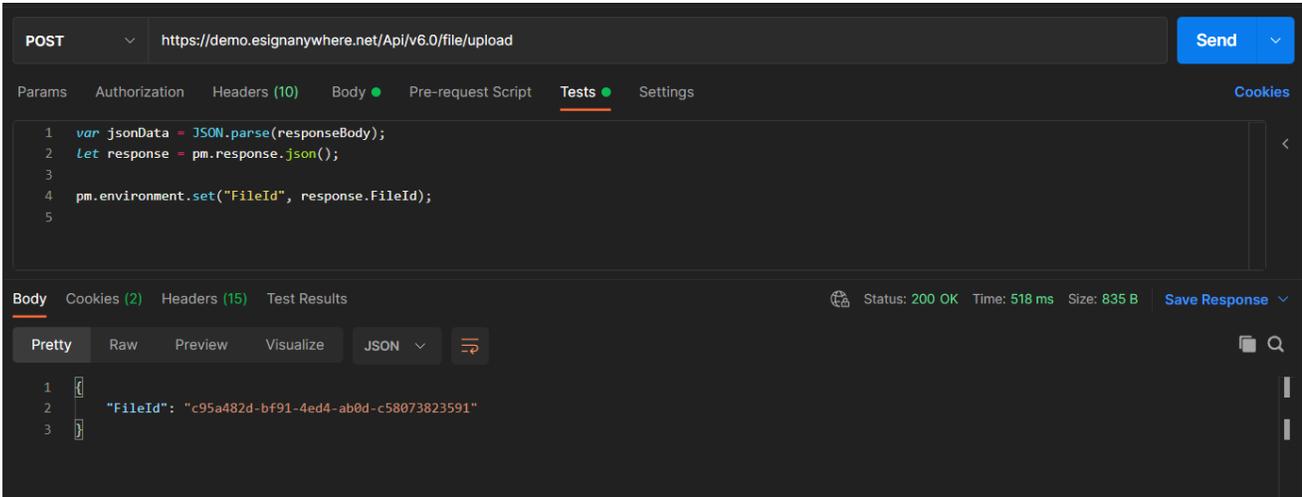

Just these three lines of code are necessary to save the file ID in another variable. First we will parse the response, then we set the file ID with the command (“pm.environment.set(“name_of_the_variable”, response.” name_of_the_response”).

After running this request, the new variable “FileId” should be in the environments. See next Figure:

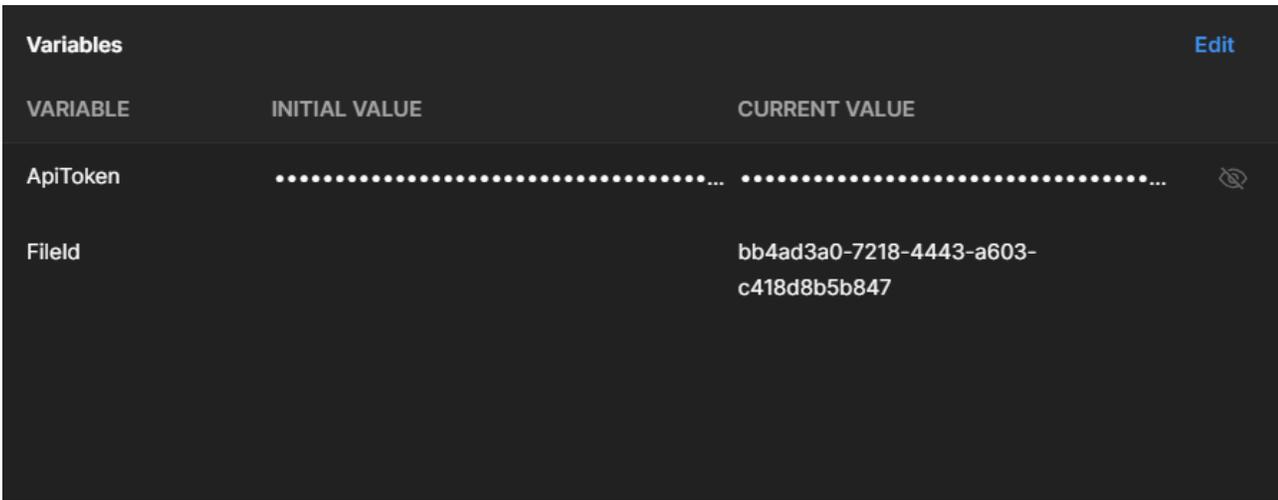

Send an envelope

After saving the file id we can now send the envelope with an integration of the variable. Therefore we just fill in {{ name_of_the_variable_for_the_fileID}} instead of copy paste the file ID. This is shown in the next Figure. In the Figure 17 there is another example of how you save a date from the response. In this case we will save the envelope ID.

```
POST https://demo.esignanywhere.net/api/v6/envelope/send Send
Params Authorization Headers (12) Body Pre-request Script Tests Settings Cookies
none form-data x-www-form-urlencoded raw binary GraphQL JSON Beautify
1 {
2   "Documents": [
3     {
4       "FileId": "{{FileId}}",
5       "DocumentNumber": 1
6     }
7   ],
8   "Name": "Test",
9   "Activities": [
10    {
11      "Action": {
12        "Sign": {
13          "RecipientConfiguration": {
14            "ContactInformation": {
```

```
POST https://demo.esignanywhere.net/api/v6/envelope/send Send
Params Authorization Headers (12) Body Pre-request Script Tests Settings Cookies
1 var jsonData = JSON.parse(responseBody);
2 let response = pm.response.json();
3
4 pm.environment.set("EnvelopeId", response.EnvelopeId);
```


Download the file

First we get the File Ids and save them in our environment:

Please note: The document must be finished! Otherwise it is not possible to retrieve the document Ids.

```
GET https://demo.esignanywhere.net/api/v6/envelope/{{EnvelopeId}}/files Send
Params Authorization Headers (12) Body Pre-request Script Tests Settings Cookies
1 var jsonData = JSON.parse(responseBody);
2 let response = pm.response.json();
3
4
5
6 pm.environment.set("Document", response.Documents[0].FileId);
7 pm.environment.set("AuditFileId", response.AuditTrail.FileId);
8 pm.environment.set("AuditXMLFileId", response.AuditTrail.XmlFileId);
```

After we have saved all document Ids we can use them for the download request.

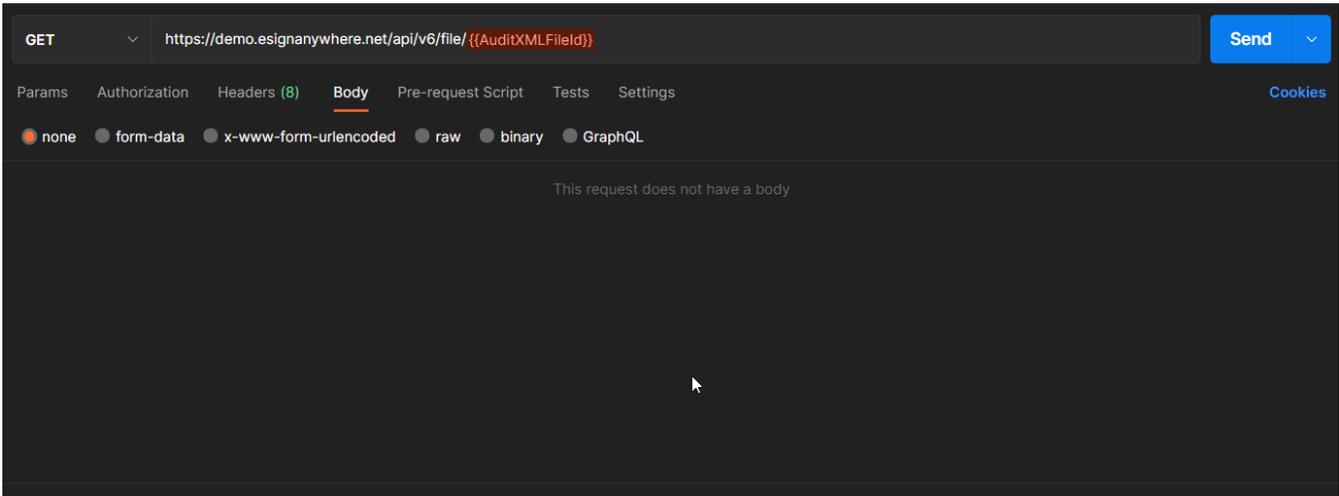

Overview of all variables

Variables		TYPE ⓘ	INITIAL VALUE ⓘ	CURRENT VALUE ⓘ	⋮	Persist All	Reset All
<input checked="" type="checkbox"/>	ApiToken	secret			
<input checked="" type="checkbox"/>	FileId	default		873c1852-1234-1234-b488-3d29da8e8f81			
<input checked="" type="checkbox"/>	EnvelopId	default		9d1e4022-1234-1234-1234-62237dc5e5db			
<input checked="" type="checkbox"/>	Document	default		62ad466f-1234-1234-1234-989c6197a890			
<input checked="" type="checkbox"/>	AuditFileId	default		2d3719c1-1234-1234-1234-2e74d3366d04			
<input checked="" type="checkbox"/>	AuditXMLFileId	default		2d0f1580-1234-1234-1234-2bc017b6c5ba			
	Add a new variable						

Advantages of using variables in Postman

First, we do not have to remember all dates which we get through all the requests. Furthermore, we can simply change the organization key and the username and we can play all requests without other changes because the variables auto fill in the new dates in the requests. Moreover we have a better overview of all ID's so that we can easily match them with the requirements of the requests.